
OCS3/E Electronic Oil Change System - 3 BSP Valves



Quick Overview

Compact oil change electronic systems for fixed boat installations. Conceived for oil fill and drain operations for all on-board uses like generators, engines, transmissions and catwalks. Their electronic control adjusts the speed of the pump according to oil viscosity/temperature and increases its speed during priming. The system automatically shuts off in case of empty tank, short circuit and after 30 minutes of operation. OCS are indicated for a perfect cleaning of all on-board areas while avoiding leaks and dispersions on the boat floor. Easy to operate and carry.

Part n.	Name	Voltage (V)	Consumption (A)	Fuse (A)	Self-priming (m)	Pressure (bar)	Flow rate (l/min)	Ports (BSP)	Motor power (W)	Weight (kg)
16492415	OCS3-E	12/24	4 / 2	10	1,5	2	Max 10 (Diesel)	1/2"	120	4,4

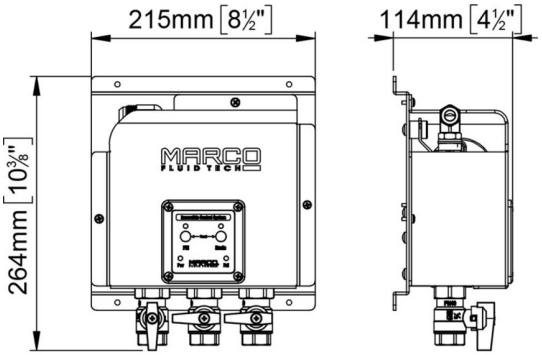

H 264 x L 215 x W 114
H 10 3/8" x L 8 1/2" x W 4 1/2"

