# Luna TRG Spotlight - White 2700°K-44°-Black

**£204.17**
Excl. Tax: £170.14

## Product Images



## Short Description

The Luna spotlight range contains some of our most advanced LED technology in an elegant adjustable spotlight. The Luna TRG is the largest of the adjustable anti-glare family and features a powerful 5 watt LED module. The Nichia™ LED chip produces a very high quality LED output with an average colour rendering index of 95. The spotlight is waterproof from both the front and rear and is available in various lens angles and colour temperatures. The TRG features a bezel free design for applications where a minimalist fitting is required. It is notable that the *Luna TRG* can be specified in custom RAL colours if installations require a spotlight that matches in with ceiling colour*. As standard, the spotlight is available in an all-black finish or a chrome and black finish.

- Interior & exterior spotlight with chrome plated bezel
- Adjustable fitting - max. 16° tilt
- Excellent anti-glare properties with recessed LED source
- Galvanised brass face, chrome plated
- Custom finishes available on request
- Tempered glass lens
- Anodised aluminium heatsink
- Multiple lens angles available
- Available in numerous white colour temperatures as well as red
- CRI>90

*minimum order quantities may apply for this customisation.

## Description


Photometric data shown below for *Plutone TG* spotlight which shares same output as *Luna TRG.* Photometric data for various lens angles shown below:


# PLUTONE TG - T90 - TRG

art./ref. 5289 - 5290 - 5293

## Power LED

283 L UMEN | 812 L UX ad 1 m | 44° ANGLE

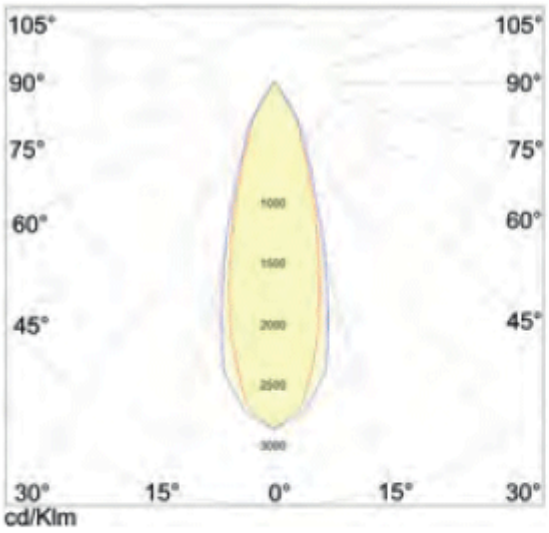

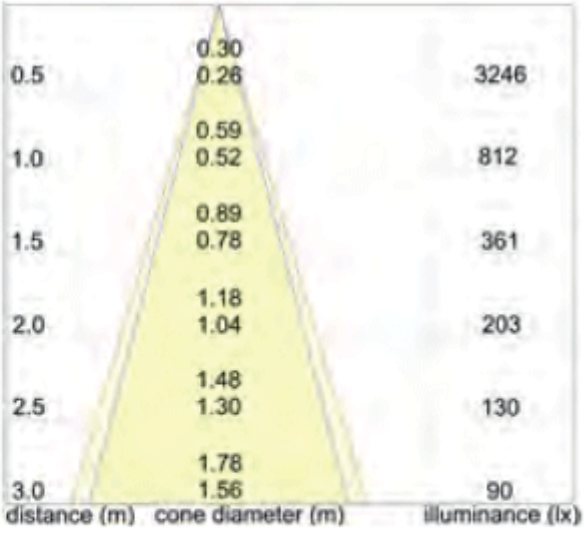



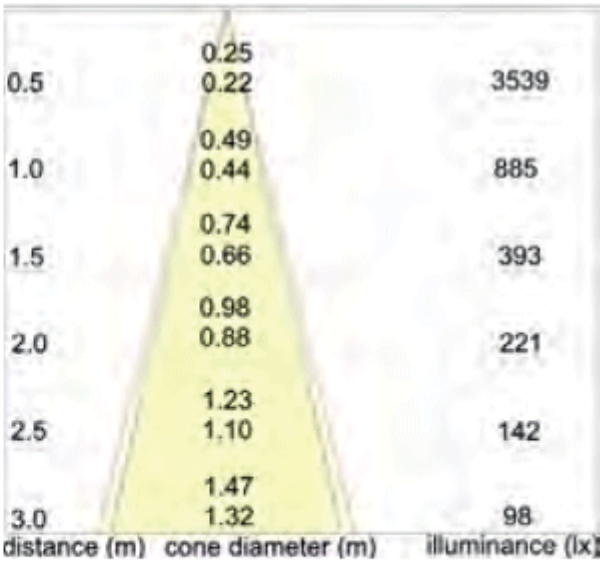
# PLUTONE TG - T90 - TRG

art./ref. 5289M - 5290M - 5293M

## Power LED

276 L UMEN | 885 L UX ad 1 m | 29° ANGLE

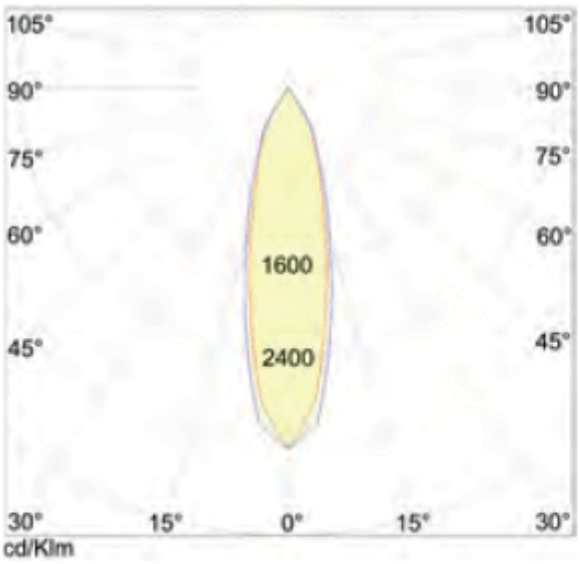





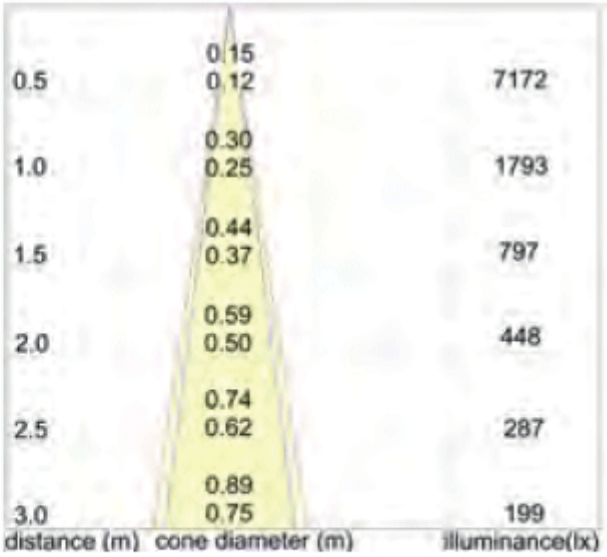
# PLUTONE TG - T90 - TRG

art./ref. 5289N - 5290N - 5293N

## Power LED

277 L UMEN | 1793 LUX ad 1 m | 14° ANGLE

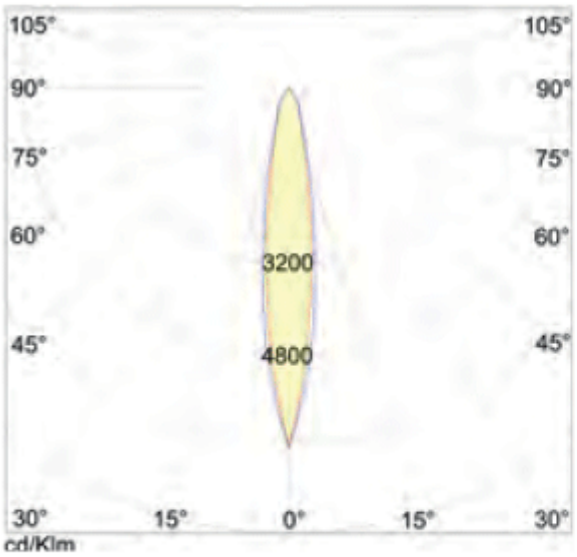

## Additional Information

| | |
|---|---|
| Weight | 0.300000 |
| Manufacturer | Foresti & Suardi |
| Finish | Black |
| Input Voltage | 10-30Vdc |
| LED Colour | White 2700°K |
| Light Element Type | Power LED |
| Wattage | 5W |
| Lens Angle | 44° |
| IP Rating | IP65 |
| Depth (mm) | 57.00 |
| Dimmer | Yes |
| Installation | Recessed |
| Cut-out Size (mm) | Ø78.00 |
| Bezel Size (mm) | Ø78.00 |
| CRI | >90 |
| Lumens Per Watt (Lm) | 56.60 |
| Lumens | 283.00 |
| Lux Level at 1 Metre | 812.00 |
| Rotation Angle | ± 16° |

