Tritone Angled Spotlight-Red-Black RAL 9005

£158.00
Excl. Tax: £131.67

Product Images






Short Description

Tritone is a fixed angle spotlight which offers excellent antiglare applications. Available in a white or black finish as standard, the luminaire has a 35° fixed orientation from centre, making it ideal for washing particular surfaces with light or simply just used for a soft indirect effect. The powerful 5W LED module is available in three colour temperatures: 2700°K, 3200°K, 4000°K as well as red.

- Interior & exterior spotlight
- Fixed 35° angle
- Excellent anti-glare properties with recessed LED source
- Anodised aluminium body in black or white

- Tempered glass lens
- Anodised aluminium heatsink
- Available in numerous white colour temperatures as well as red
- CRI>90

Description

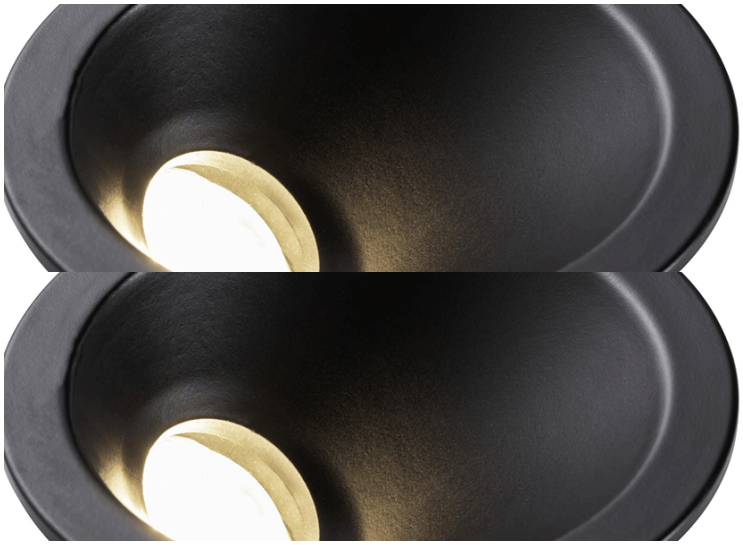







Heat Dissipation

Heat dissipation is key to the performance and longevity of LED lighting. Our Power LED modules have been carefully designed to ensure that the heat is taken away from the LED chips and dissipated through the incorporated heat sink designed into the product housing.

Circuit board temperatures are closely monitored during the development phase of each product and appropriate heat dissipation can then be accurately calculated to ensure that product will continue to perform for many years


---


Power Regulator

The 10-30Vdc power regulator is always a remote item on the power cable of the fitting. This offers numerous advantages over alternative methods used by competitor brands. Keeping the power regulator separate reduces heat build-up on the LED circuit board and therefore increases performance and longevity of the

LEDs.


Remote regulators can also be easily removed so that the product can be powered directly with the correct amperage, very useful for integration in some mains voltage applications.

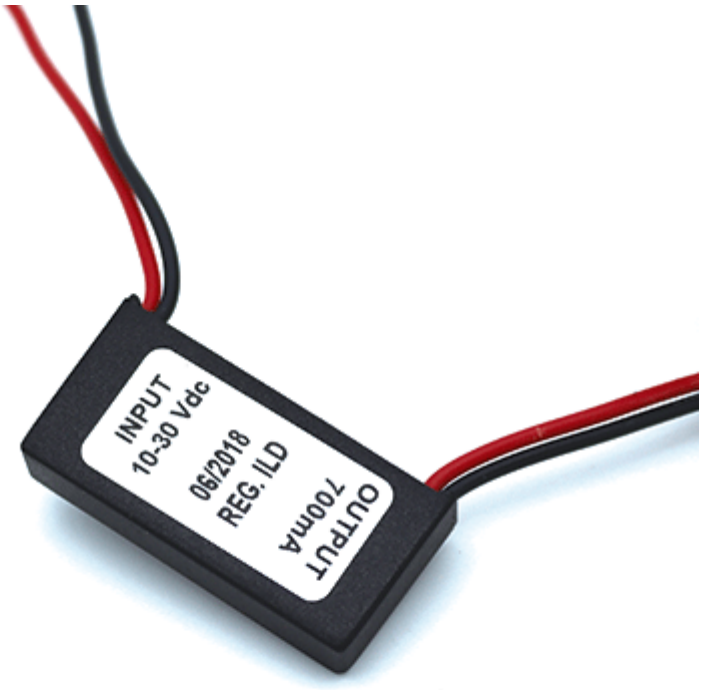


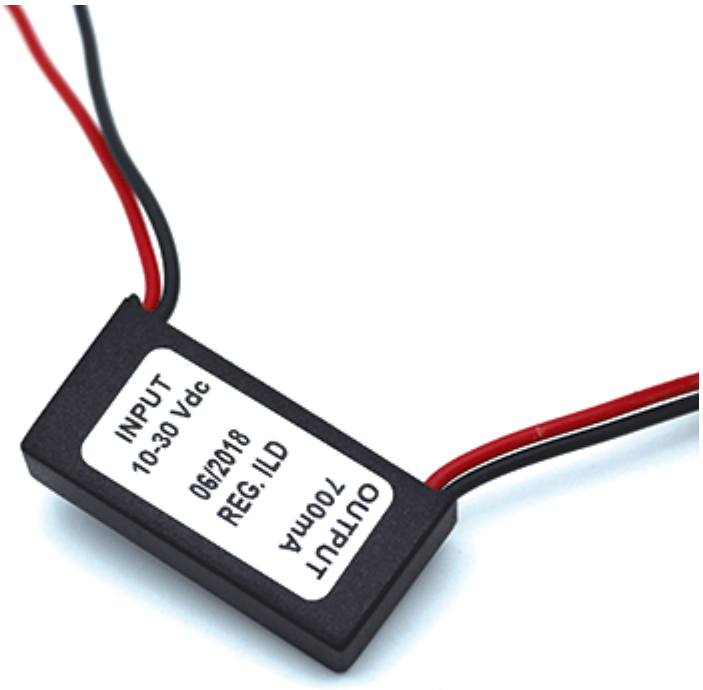







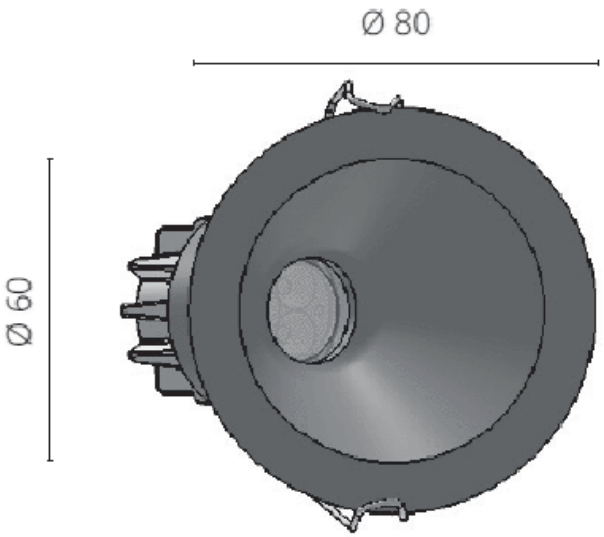

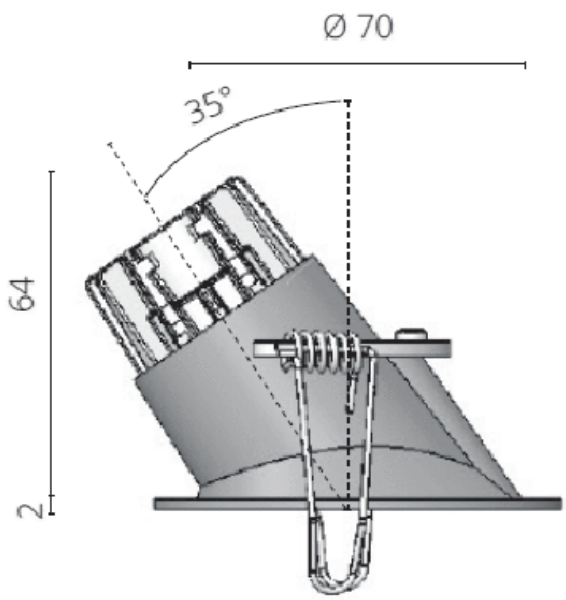

Power Led

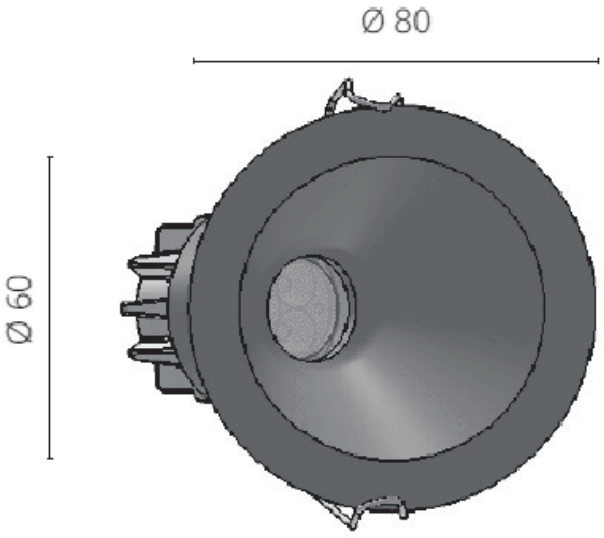

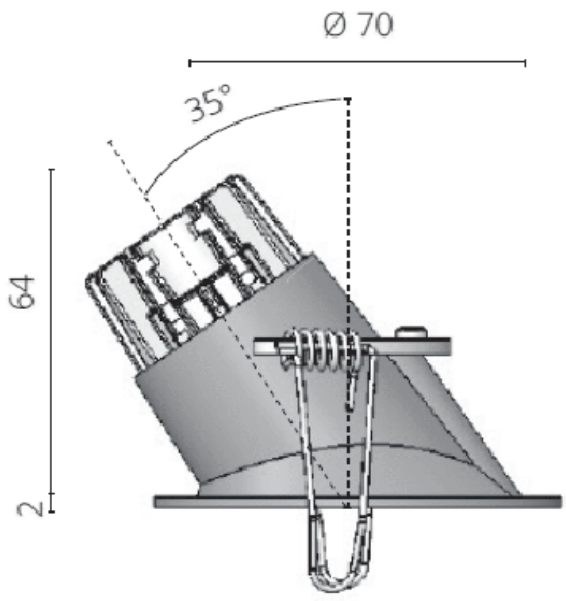

Power Led

Additional Information

Weight	0.150000
Manufacturer	Foresti & Suardi
Finish	Black RAL 9005
Input Voltage	10-30Vdc
LED Colour	Red
Light Element Type	Power LED
Wattage	5W
IP Rating	IP65
Depth (mm)	38.00
Dimmer	Yes
Installation	Recessed
Cut-out Size (mm)	80.00 x 60.00
Bezel Size (mm)	Ø45.00
CRI	>90
Angle	35°

